



H8B

• Application




• Certificate



Technical Data

Type	H8B
Protection	overload and short circuit
Rated current (A)	1~63
Characteristic	B,C,D
Poles	1,1P+N,2,3,3P+N,4
Breaking capacity	12000(<32A) 10000(≥ 32A)
Standard	IEC60898-1
Approval	CE, CCC, RoHS
Type of trip	thermal magnetic release
Electrical endurance	20000
Mount	on 35mm din rail
Width	17.8mm per pole
Terminal	Lug type(cable up to 25mm ²)
Auxiliary switch, AX&AL,optional	auxiliary, alarm, shunt, overvoltage and undervoltage

Curve Graph

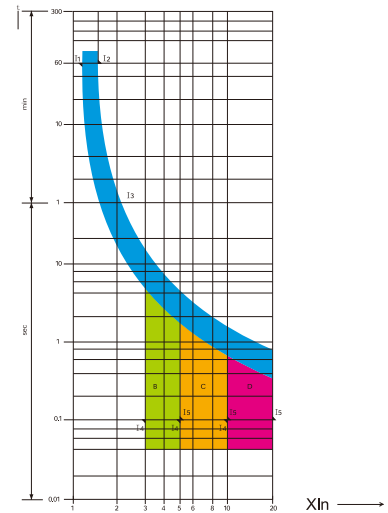

Overall Dimension

