



### HUM18-125

#### • Application




#### • Certificate



#### Technical Data

Type	HUM18-125
Protection	overload and short circuit
Rated current (A)	63-125
Characteristic	C, D
Poles	1P, 2P, 3P, 4P
Breaking capacity	15000
Standard	IEC60898-1
Approval	CE, CCC, RoHS
Type of trip	thermal magnetic release
Electrical endurance	8000
Mount	on 35mm din rail
Width	27mm per pole
Terminal	Lug type(cable up to 50mm <sup>2</sup> )
Auxiliary switch, AX&AL, optional	auxiliary, alarm, shunt, overvoltage and undervoltage

#### Curve Graph

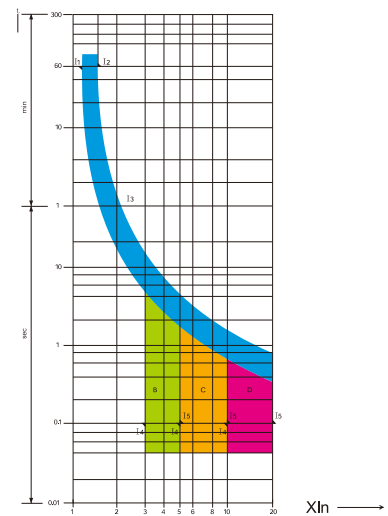

#### Overall Dimension

