

RT18


Series Filler Powder-filled Cartridge Fuse




I. Scope of Application

The RT18 Series Fuse Disconnecter is suitable for the overload and short-circuit protection in power distribution devices with the rated voltage of 220 V/380 V and the rated current up to 63 A. The neon lamp and resistor constitute the fuse signal device of the fuse link of the disconnecter (code "X"). The product meets the requirements of GB/T13539.1 and GB/T13539.2.

II. Model Description

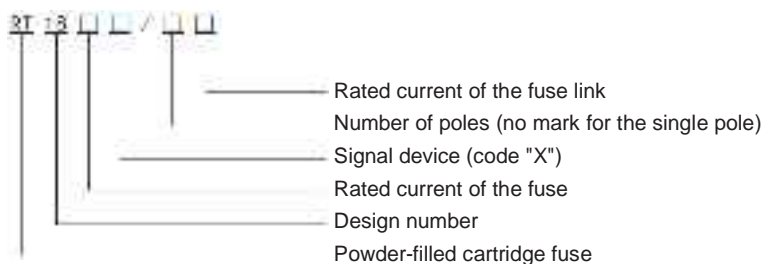

III. Outline and Installation Dimensions

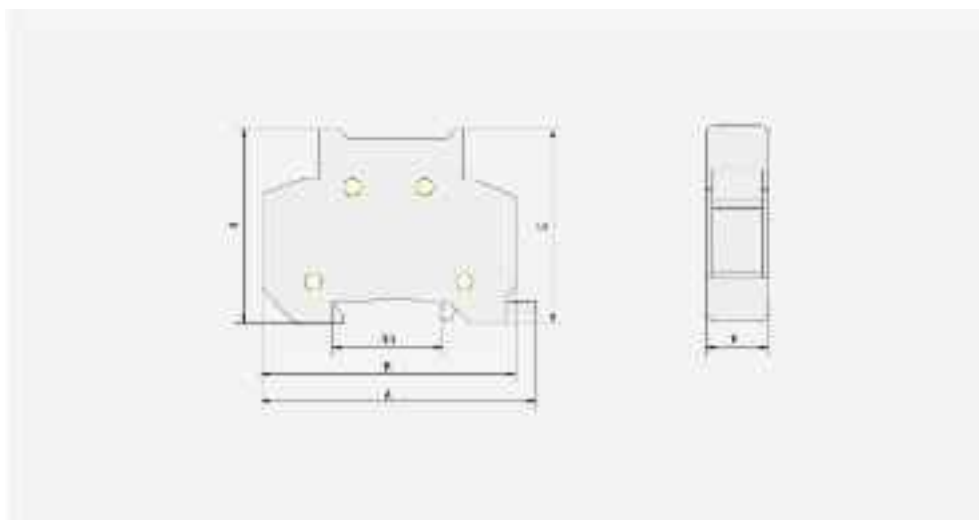

Model	Rated current (A)	Size (mm)					Weight (kg)
		A	B	D	E	F	
RT18-32	2, 4, 6, 10, 16, 20, 25, 32	82	78	60	77	18	0.075
RT18-32X							
RT18-63	2, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63	106	103	80	110	26	0.18
RT18-63X							