


BH-0.66 series current transformer



Application

To be used in combination with measurement instruments;ammeters,watt-hour meters,measurement units,control relays,etc.

Type designation

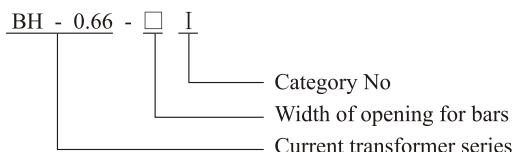

Technical data

- Secondary current Isn:5A
- Max.voltage rating Ue:660V
- Frequency:50/60Hz
- Safety factor(fs):10
- Degree of protection:IP20
- Operating temperature : -5°C to $+40^{\circ}\text{C}$,humidity<80%
- Standards:IEC/EN60044-1
- Installation type:mounting on plates or bars

Technical data

| Model | Transformation ratio(Ipn/Isn) | Rated output(VA) | | | | Circles of the cable | Overall and mouting dimension(mm) | | |
|--------------------|-------------------------------|------------------|-----|------|-----|----------------------|-----------------------------------|--|--|
| | | Accuracy class | | | | | | | |
| | | 1 | 0.5 | 0.5S | 0.2 | | | | |
| BH-0.66 solid type | 5/5 | 5 | 2.5 | | | | | | |
| | 10/5 | 5 | 2.5 | | | | | | |
| | 15/5 | 5 | 2.5 | | | | | | |
| | 20/5 | 5 | 2.5 | | | | | | |
| | 25/5 | 5 | 2.5 | | | | | | |
| | 30/5 | 5 | 2.5 | | | | | | |
| | 40/5 | 5 | 2.5 | | | | | | |
| | 50/5 | 5 | 2.5 | | | | | | |
| | 75/5 | 5 | 2.5 | | | | | | |
| | | | | | | | | | |
| BH-0.66 20 I | 75/5 100/5 | 2.5 2.5 | | | | 1 1 | | | |
| | | | | | | | | | |
| | | | | | | | | | |