



**HUM18Z-50**

• Application




• Certificate





Technical Data

Type	HUM18Z-50
Protection	overload and short circuit
Rated current (A)	6~50
Characteristic	B,C
Poles	1P,2P
Breaking capacity	6000
Standard	IEC60898-2
Approval	CE, CCC, RoHS
Type of trip	thermal magnetic release
Electrical endurance	20000
Mount	on 35mm din rail
Width	17.8mm per pole
Terminal	Lug type(cable up to 25mm <sup>2</sup> )
Auxiliary switch, AX&AL, optional	auxiliary, alarm, shunt, overvoltage and undervoltage

Curve Graph

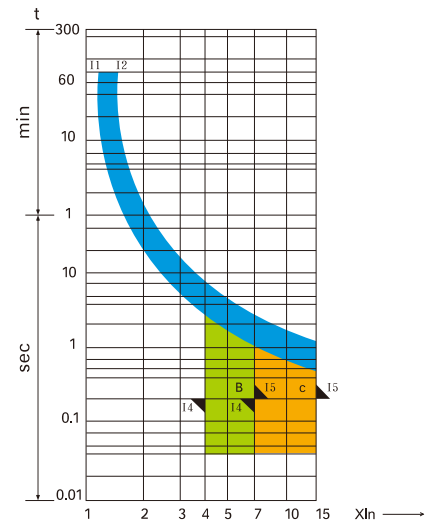

Overall Dimension

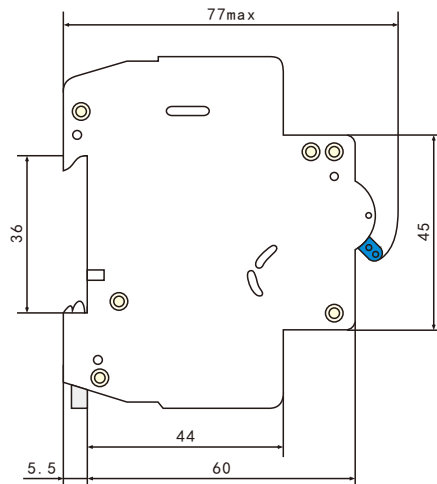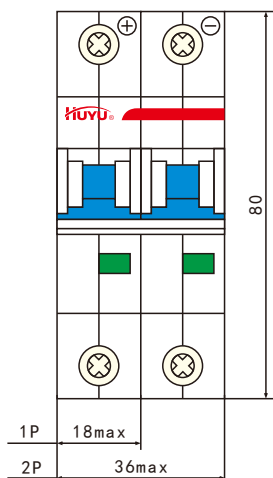




### Optional accessories-shunt

Model No.	FL1,2
Rating	24V-60V(AC,DC), AC 110V-400V(DC 110V-220V)
Type of terminal	Screw terminal
Terminal capacity	25mm <sup>2</sup>
Width	18mm



### Optional accessories-under voltage

Model No.	QY
Rating	230V
Type of terminal	Screw terminal
Terminal capacity	25mm <sup>2</sup>
Width	18mm



### Optional accessories-auxiliary

Model No.	F1,2
Rating	230V
Type of terminal	Screw terminal
Terminal capacity	6mm
Width	29mm



### Optional accessories-alarm

Model No.	FB
Rating	230V
Type of terminal	Screw terminal
Terminal capacity	6mm
Width	29mm



### Optional accessories-over voltage and under voltage

Model No.	GQY
Rating	230V
Type of terminal	Screw terminal
Terminal capacity	25mm <sup>2</sup>
Width	18mm



### Over voltage

Model No.	GY
Rating	230V
Type of terminal	Screw terminal
Terminal capacity	25mm <sup>2</sup>
Width	18mm